

1010 01010101010101

maxton

Maxton Power Tech Co.,Ltd
www.maxtonpower.com
info@maxtonpower.com

MPE12-22 (12V22Ah)

- * Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- * Computer designed lead, calcium tin alloy grid for high power density.
- * UL-recognized component.
- * Long service life, float or cyclic applications.
- * Maintenance-free operation.
- * Low self discharge.
- * Case and cover are available in both standard and flame retardant ABS (Standard :UL94V0).



Maxton Power Tech Co.,Ltd
www.maxtonpower.com
info@maxtonpower.com

MPE12-22 (12V22Ah)

Battery picture and construction


Nominal Voltage		12V
Rated capacity (20 hour rate)		22Ah
Dimensions (±2mm)	Total Height	167 mm (6.57 inches)
	Height	167 mm (6.57 inches)
	Length	181 mm (7.13 inches)
	Width	77 mm (3.03 inches)
Weight Approx(±3%)		6.10Kg (13.45 lbs)



Battery Construction

Component	Positive plate	Negative plate	Container	Cover
Raw material	Lead dioxide	Lead	ABS	ABS
Component	Electrolyte	Separator	Safety valve	Terminal
Raw material	Dilute sulfuric acid	Fiberglass	Rubber	Copper

Outer dimension and terminal

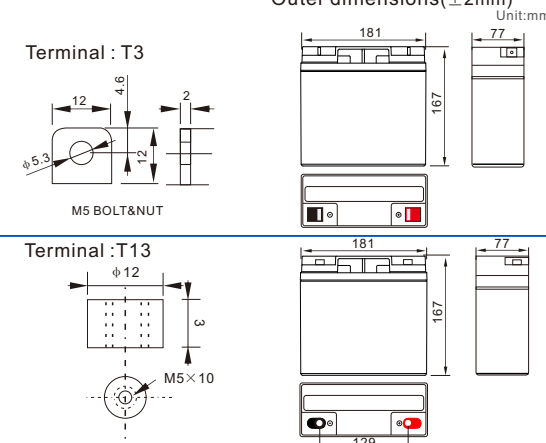Outer dimensions($\pm 2\text{mm}$)

Characteristics

Capacity 25℃(77℉)	20 hour rate(1.1 A,10.5V) 10 hour rate(2.02A,10.5V) 5 hour rate(3.74A,10.5V) 1 hour rate(13.2 A,9.6V)	22.0Ah 20.2Ah 18.7Ah 13.2 Ah
Internal Resistance	Full charged battery at 25℃(77℉)	Approx 10mΩ
Capacity affected by Temperature (20hour rate)	40℃ (104℉) 25℃ (77℉) 0℃ (32℉) -15℃ (5℉)	102% 100% 85% 65%
Remaining capacity	Capacity after 3 month storage	91%
Self-Discharge	Capacity after 6 month storage	82%
At 25℃(77℉)	Capacity after 12 month storage	64%
Terminal type	T3 (Option T13)	
Max. Discharge current 25℃/(77℉)	330A (5Seconds)	
Nominal operating temperature	25℃ ±5℃(77℉ ±9℉)	
Operating Temperature Range	Discharge Charge Storage	-15℃ ~50℃ (5℉ ~122℉) -10℃ ~50℃ (14℉ ~122℉) -20℃ ~50℃ (-4℉ ~122℉)
Charge methods (constant Voltage) At 25℃(77℉)	Cycle use	Initial Charging Current less than 6.6 A Voltage 14.50-14.90V Temperature compensation:-30mV/℃
	Standby use	Voltage 13.50-13.80V Temperature compensation:-18mV/℃

Constant current discharge (25°C , 77 °F)

Unit:A

Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C(77°F)													
Time		5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	79.2	51.9	38.5	25.3	13.2	7.7	5.67	4.55	3.86	2.55	2.08	1.14
	W	934.1	586.7	443.7	268.6	152.2	89.1	65.54	52.62	44.64	29.43	24.11	13.20
10.20V	A	72.6	49.7	35.4	24.0	12.4	7.4	5.50	4.40	3.79	2.50	2.04	1.11
	W	879.1	555.5	417.1	266.8	143.0	85.5	63.71	50.97	43.82	28.97	23.65	12.83
10.50V	A	66.1	46.4	33.0	23.3	12.0	7.2	5.41	4.18	3.77	2.48	2.02	1.10
	W	848.8	539.0	398.8	264.0	138.8	83.9	62.61	48.40	43.54	28.69	23.47	12.74
10.80V	A	63.5	44.4	30.8	22.6	11.6	7.1	5.32	4.11	3.58	2.41	1.97	1.07
	W	744.3	522.5	384.1	263.1	134.8	82.1	61.88	47.80	41.62	27.50	22.92	12.47
11.10V	A	58.7	41.8	28.6	22.0	11.2	6.9	5.04	4.03	3.42	2.35	1.93	1.06
	W	719.6	505.1	365.8	261.3	132.9	81.6	60.04	47.67	40.70	26.58	22.46	12.38


(Above characteristics data are average values obtained within three charge/discharge cycles,not the minimum values.)

Constant power discharge (25°C , 77 °F)


Unit:watts

Deep Cycle Battery (VRLA Battery, AGM technology) Maintenance-free Sealed Lead Acid Rechargeable Battery


Discharge characteristics (25°C, 77°F)

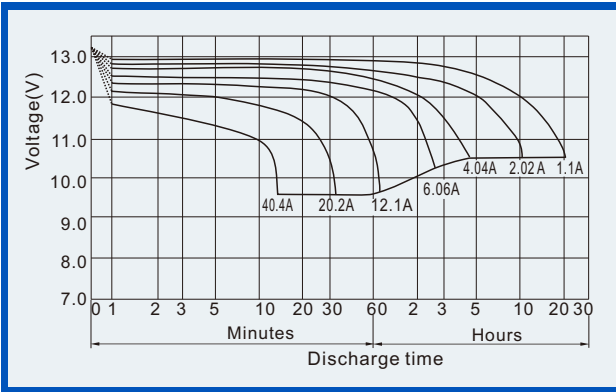


Charge characteristics (25°C, 77°F)

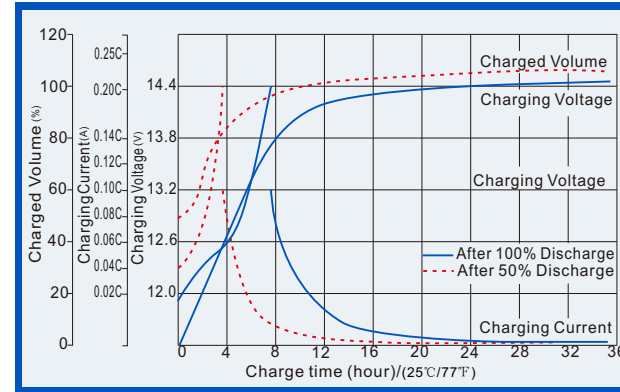


Life characteristics of Cyclic Use (25°C, 77°F)

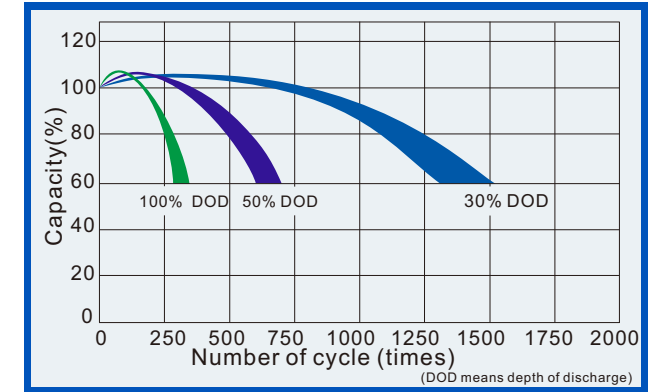


Effect of Temperature on capacity

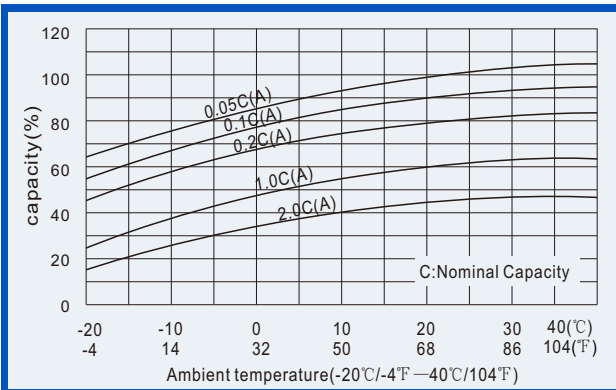


Self-discharge characteristics

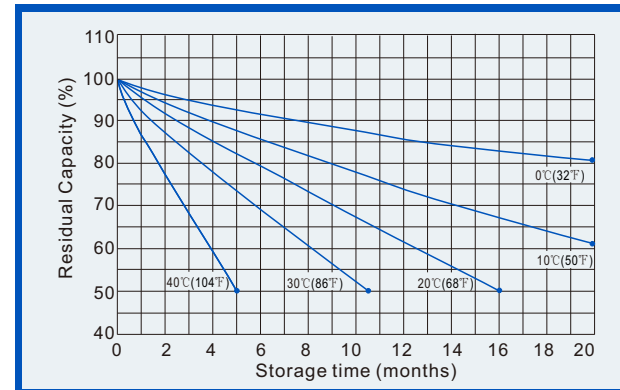


Life Characteristics of standby use (25°C, 77°F)

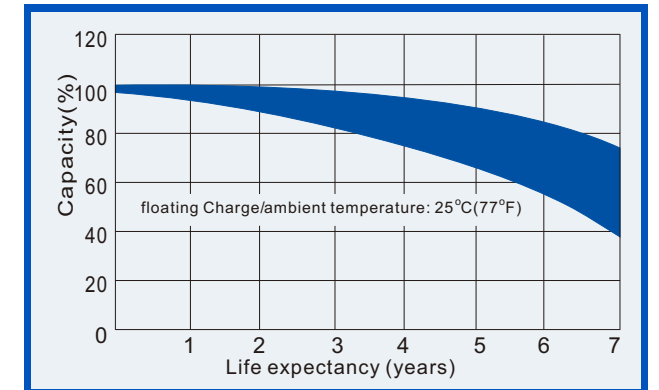

Relationships for open voltage and remained capacity (for reference)

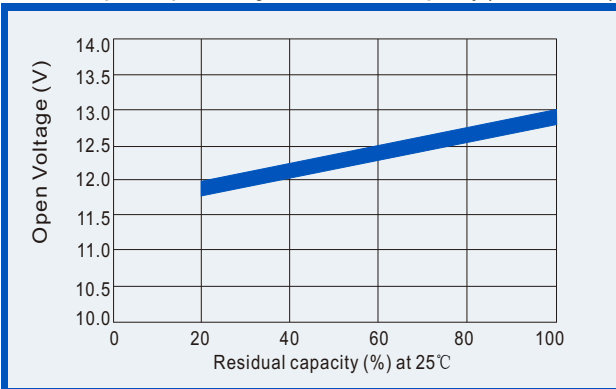

Relationship for charging voltage and temperature

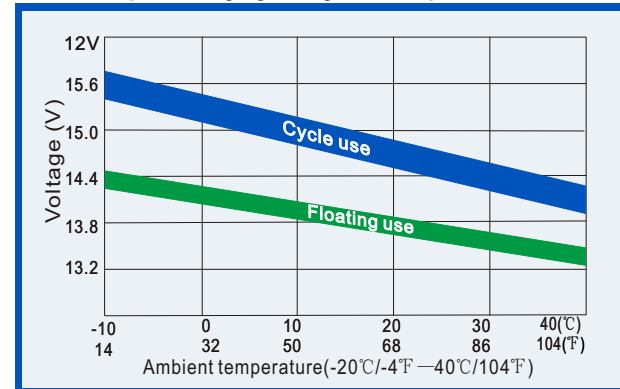

Temperature effects on floating life

