

General features & applications for MPLFP Series (LiFePO4 battery)

- * Safe technology.
Communication of monitored data via inside BMS.
- * Lighter weight.
About less 1/2 of the weight to equivalent lead acid battery.
- * Environmental friendly.
Neither contain any toxic heavy metals (for exmples lead ,
Cadmium),nor corrosive acids.
- * Maintenance-free operation;lower self-discharge.

- * Longer cycle life;Higher power.
At normal condition,thousands of cycles @ 100% DOD.
- * Excellent cycle performance and lower total cost of ownership.
- * Wide operating temperature range (-20°C~55°C).
- * LiFePO4 battery is customizable.
- * Main applications:



Maxton Power Tech Co.,Ltd
www.maxtonpower.com
info@maxtonpower.com



MPLFP12.8-12 (12.8V12Ah)


Battery Specifications

Nominal Voltage		12.8V
Rated Capacity		12Ah
Rated Energy		153.6Wh
Dimensions	Total Height	100mm (3.92inches)
	Height	94mm (3.68inches)
	Width	98mm (3.84inches)
	Length	151mm (5.92nches)
Weight Approx		1.2Kg (2.64lbs)
Terminal type / Torque		T2
Outer case's material		ABS
BMS build-in		Yes
LCD Screen /Bluetooth/heating function		Optional
Max in Parallel		4 PCS
Max in Series		4 PCS

Battery picture




Different Temperature Discharge Curve (0.5C)

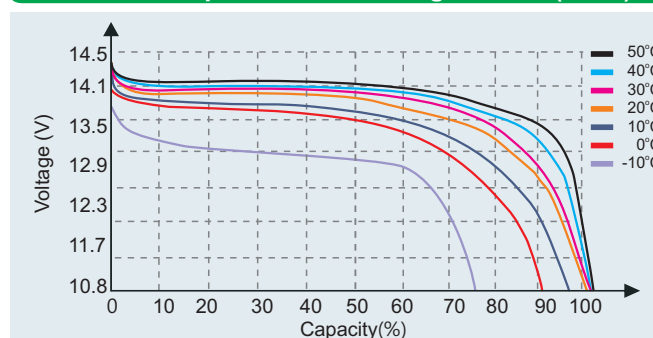


Battery outer dimension and terminal

Terminal :T2



Outer dimensions



Unit:mm


Battery Characteristics

Normal character (at 25°C)	Operation voltage	10.8V~14.4V
	Monthly self-discharge	<3%
	All Efficiency-round trip	>98%
	Cycle life(80%.DOD)	5000 cycles @0.2C
Operating Temperature Range	Charge	0°C~55°C (32°F~131°F)
	Discharge	-20°C~55°C (-4°F~131°F)
	Storage	-20°C~45°C (-4°F~113°F)
Standard Charge (at 25°C)	Recommended Charge voltage	14.0V
	Max Charge voltage	14.6V
	Recommended charge current	2.4A
	Max Charge current	12A
Standard Discharge (at 25°C)	Max discharge current	12A
	Peak discharge current	25A/3S
	Recommend discharge cut-off voltage	11.2V
	Max discharge cut-off voltage	10.8V


Constant Current & Power discharge table (25°C)

Discharging time		1h	2h	3h	4h	5h	10h	20h
Cut-off voltage (10.8V)	A	12	6	4	3	2.4	1.2	0.6
	W	153.6	76.8	51.2	38.4	30.72	15.36	7.68

Different Rate Discharge Curve(25°C)

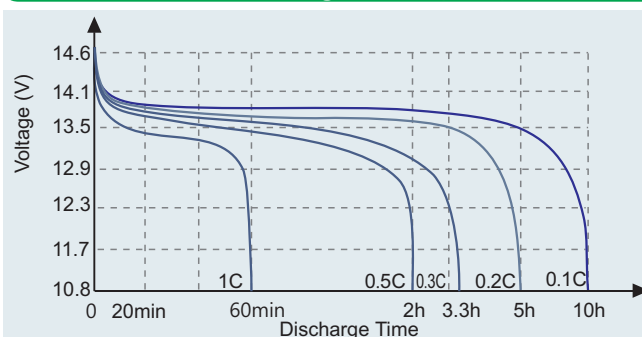

Charging Characteristics(0.5C,25°C)

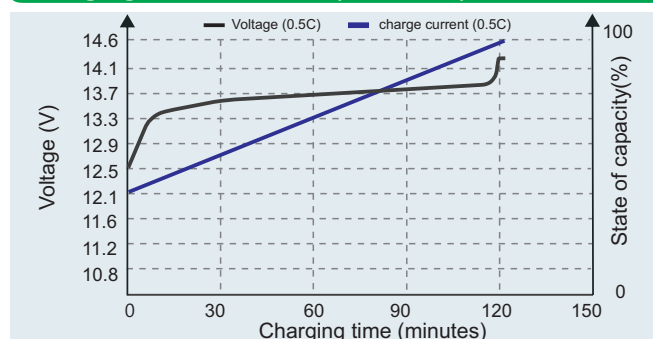

Different DOD discharge cycle life curve(0.2C,25°C)

