

## General features for MPPV Series battery (OPzV)

- \* Tubular positive plate; separator with the combined application of porous rubber and porous PVC, separator is with a high porosity & good corrosion resistance. Gelled electrolyte technology.
- \* Computer designed lead, calcium tin alloy grid for high power density.
- \* Long service life, maintenance-free during the whole service life.
- \* Alloy (no antimony) and internal oxygen recombination ensure low gassing.
- \* High cyclic ability, no internal short circuits in the GEL structure.
- \* Easy to move and handle, easy using cable connectors or copper connectors in the battery connection..




**Maxton Power Tech Co., Ltd**  
www.maxtonpower.com  
info@maxtonpower.com

**MPPV2-350 (2V350Ah)**

## Specifications

Nominal Voltage		2 V
Rated capacity (10 hour rate)		350 Ah
Dimensions (±3mm)	Total Height (Include terminal)	506mm (19.9inches)
	Height	470mm (18.5inches)
	Length	124mm (4.88inches)
	Width	206mm (8.11inches)
Approx weight (±5%)		26.5Kg (58.3lbs)


## Battery picture and construction

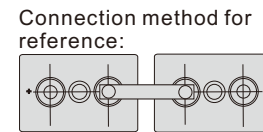

### Battery Construction

Component	Positive plate	Negative plate	Container	Cover
Raw material	Lead dioxide	Lead	ABS	ABS
Component	Electrolyte	Separator	Safety valve	Terminal
Raw material	Gelled acid	PVC	Rubber	Copper

## Outer dimension and terminal

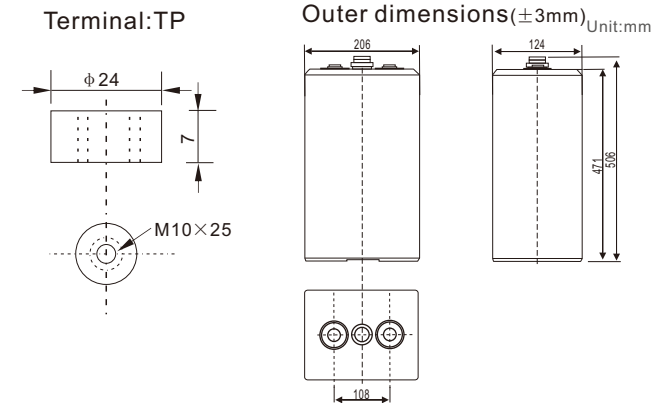

## Characteristics

Capacity 25°C(77°F)	10 hour rate(35A, 1.8V) 3 hour rate(93A, 1.75V) 1 hour rate(184A, 1.75V)	350Ah 279Ah 184Ah
Internal Resistance	Full charged battery at 25°C(77°F)	Approx 0.8 mΩ
Capacity affected by Temperature (10hour rate)	40°C (104°F) 25°C (77°F) 0°C (32°F) -15°C (5°F)	103% 100% 85% 65%
Remaining capacity Self-Discharge At 25°C(77°F)	Capacity after 3 month storage Capacity after 6 month storage Capacity after 12 month storage	94% 88% 75%
Terminal type	TP (copper)	
Max. Discharge current 25°C/(77°F)	1750A (5Seconds)	
Nominal operating temperature	25°C ±5°C(77°F ±9°F)	
Operating Temperature Range	Discharge Charge Storage	-15°C ~50°C (5°F ~122°F) -10°C ~50°C (14°F ~122°F) -20°C ~50°C (-4°F ~122°F)
Charge methods (constant Voltage) At 25°C(77°F)	Cycle use Standby use	Initial Charging Current less than 87.5 A Voltage 2.35-2.45V Temperature compensation:-4mV/°C Voltage 2.25-2.30V Temperature compensation:-3mV/°C

## Constant current discharge (25°C , 77 °F)

## Constant power discharge (25°C , 77 °F)


Unit:A

Unit:watts


Time		30min	1h	2h	3h	5h	6h	8h	10h	20h	24h	48h	100h
1.65V	A	305	201	132	103	71	58	47	41	21	17	9	5
	W	639	411	295	207	134	128	106	79	40	36	24	12
1.70V	A	296	193	124	97	67	54	45	39	21	17	9	5
	W	600	399	289	200	131	124	102	76	39	35	24	12
1.75V	A	280	184	117	93	64	52	43	37	20	17	9	5
	W	549	389	281	193	130	120	98	74	39	35	24	12
1.80V	A	270	175	111	88	60	49	41	35	19	17	9	5
	W	488	364	275	186	126	116	95	72	39	35	23	12
1.85V	A	254	166	106	82	57	47	39	33	18	16	9	5
	W	424	355	261	176	121	110	90	68	36	33	23	12

(Above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.)


**Discharge characteristics (25°C, 77°F)**

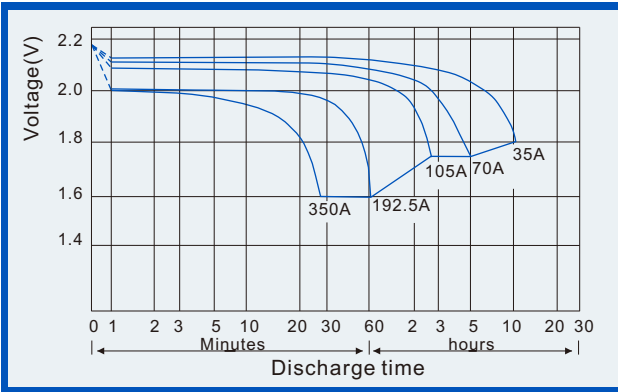


**Charge characteristics (25°C, 77°F)**

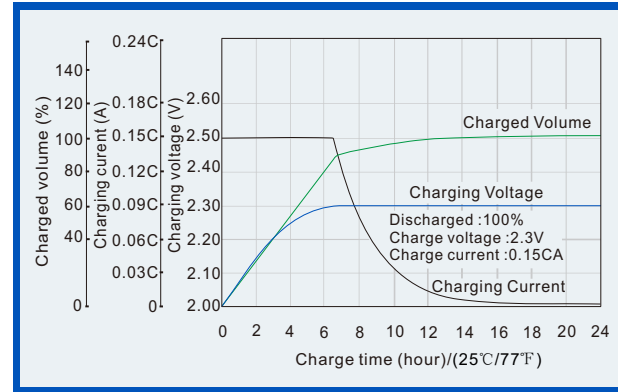


**Life characteristics of Cyclic Use (25°C, 77°F)**

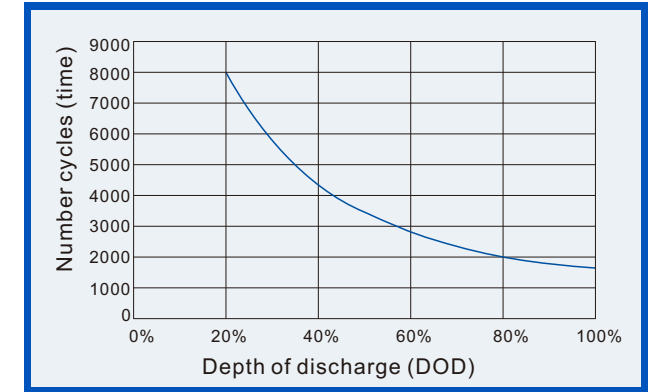


**Effect of Temperature on capacity**

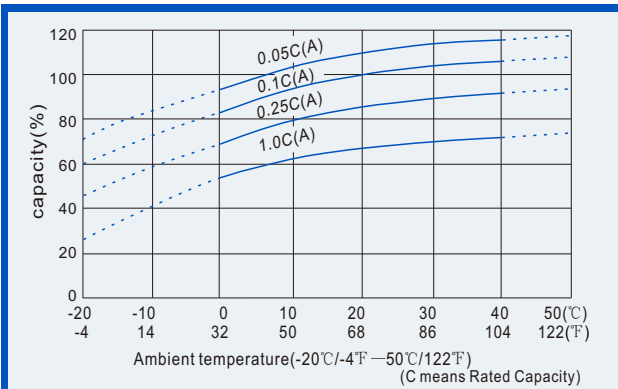


**Self-discharge characteristics (with full charging)**

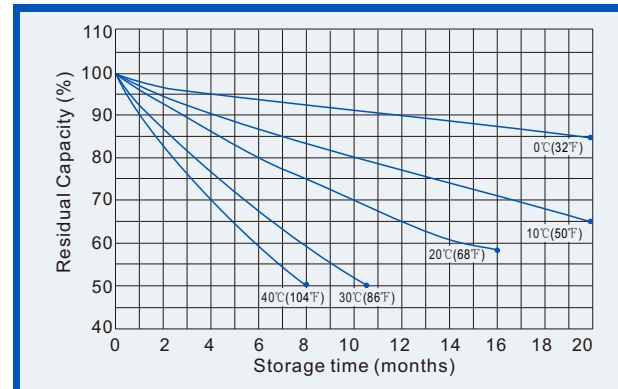


**Relationships for design life and temperature**

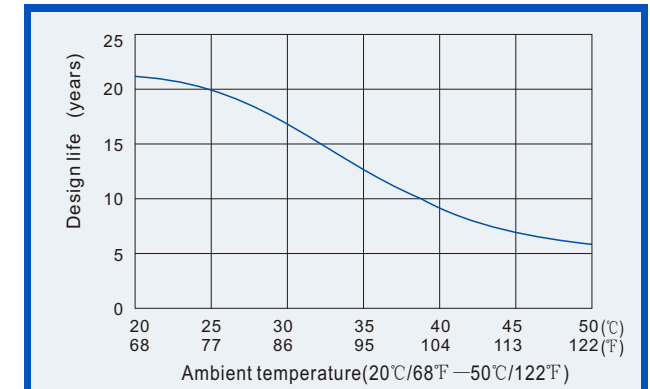

**Relationships for open voltage and remained capacity (for reference)**

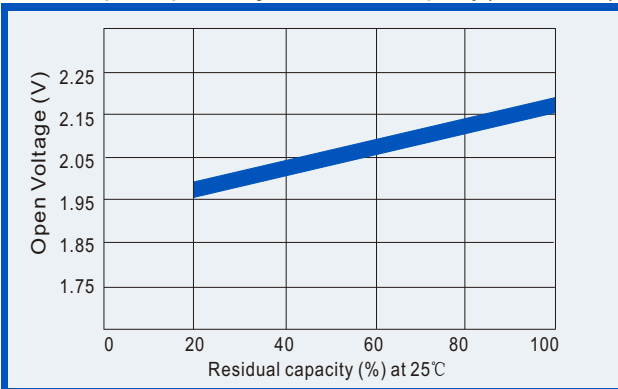

**Relationship for charging voltage and temperature**

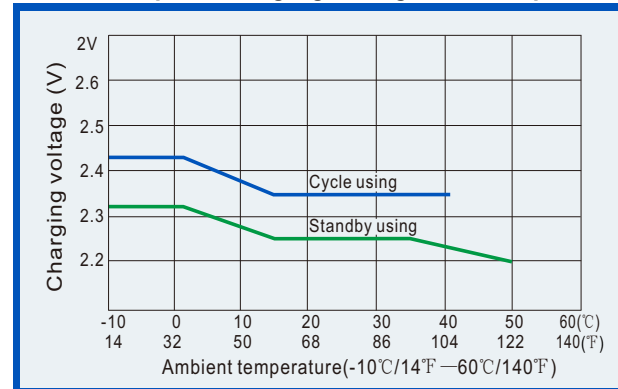

**Effect of temperature on capacity**

