

### General features for MPa Series (AGM) battery

- \* Stable quality & high reliability.
- \* Unique construction and sealing technique guarantees.
- \* Design life 5years in float service; Long service life ,float or cyclic, which is shown in the specification sheet.
- \* Maintenance-free operation. UL-recognized component.
- \* Heavy duty grids: The heavy-duty lead calcium-alloy grids ,provide an extra margin of performance and service life in float & cyclic.
- \* Case and cover are available in both standard and flame retardant ABS.
- \* Low self discharge; low pressure venting system.



**Maxton Power Tech Co., Ltd**  
www.maxtonpower.com  
info@maxtonpower.com

**MP6-2.8 (6V2.8Ah)**

### Specifications

Nominal Voltage		6 V
Rated capacity (20 hour rate)		2.8 Ah
Dimensions (±1mm)	Total Height	103 mm(4.06 inches)
	Height	97 mm(3.82 inches)
	Length	66 mm(2.60 inches)
	Width	33 mm(1.30 inches)
Weight Approx(±3%)		0.49 Kg (1.08 lbs)


### Battery picture and construction



#### Battery Construction

Component	Positive plate	Negative plate	Container	Cover
Raw material	Lead dioxide	Lead	ABS	ABS
Component	Electrolyte	Separator	Safety valve	Terminal
Raw material	Dilute sulfuric acid	Fiberglass	Rubber	Copper

### Outer dimension and terminal

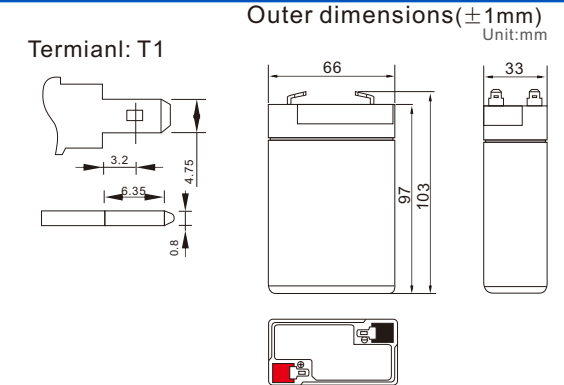

### Characteristics

Capacity 25°C(77°F)	20 hour rate(0.14 A,5.25V)	2.8Ah
	10 hour rate(0.26A,5.25V)	2.6Ah
	5 hour rate(0.48A,5.25V)	2.4Ah
	1 hour rate(1.68 A,4.8V)	1.68 Ah
Internal Resistance	Full charged battery at 25°C(77°F)	Approx 32 mΩ
Capacity affected by Temperature (20hour rate)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Remaining capacity Self-Discharge At 25°C(77°F)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Terminal type	T1	
Max. Discharge current 25°C/(77°F)	42A (5Seconds)	
Nominal operating temperature	25°C ±5°C(77°F ±9°F)	
Operating Temperature Range	Discharge	-15°C ~50°C (5°F ~122°F)
	Charge	-10°C ~50°C (14°F ~122°F)
	Storage	-20°C ~50°C (-4°F ~122°F)
Charge methods (constant Voltage) At 25°C(77°F)	Cycle use	Initial Charging Current less than 0.84A Voltage 7.05-7.20V Temperature compensation:-15mV/°C
	Standby use	Voltage 6.75-6.90V Temperature compensation:-9mV/°C

### Constant current discharge (25°C , 77 °F)

Unit:A

### Constant power discharge (25°C , 77 °F)

Unit:watts


#### Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C(77°F)

Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
4.80V	A	10.08	6.32	4.90	3.22	1.68	0.98	0.72	0.58	0.49	0.32	0.26
	W	59.4	37.3	28.2	17.1	9.7	5.7	4.17	3.35	2.84	1.87	1.53
5.10V	A	9.24	6.18	4.50	3.06	1.58	0.94	0.70	0.56	0.48	0.32	2.60
	W	55.9	36.8	26.5	17.0	9.1	5.4	4.05	3.24	2.79	1.84	1.51
5.25V	A	8.57	5.91	4.20	2.96	1.53	0.92	0.69	0.53	0.48	0.32	0.26
	W	54.0	34.3	25.4	16.8	8.8	5.3	3.98	3.08	2.77	1.83	1.49
5.40V	A	7.80	5.65	3.92	2.83	1.47	0.90	0.68	0.52	0.46	0.31	0.25
	W	51.6	33.3	24.4	16.7	8.6	5.2	3.94	3.04	2.65	1.75	1.46
5.55V	A	6.75	5.32	3.64	2.63	1.42	0.88	0.64	0.51	0.44	0.30	0.25
	W	40.2	32.1	23.3	16.6	8.5	5.2	3.82	3.03	2.59	1.69	1.43


(Above characteristics data are average values obtained within three charge/discharge cycles,not the minimum values.)

# VRLA Battery (AGM technology) Maintenance-free Sealed Lead Acid Rechargeable Battery


**Discharge characteristics (25°C, 77°F)**

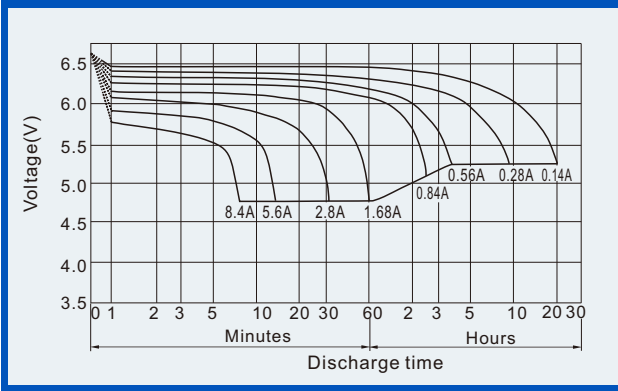


**Charge characteristics (25°C, 77°F)**

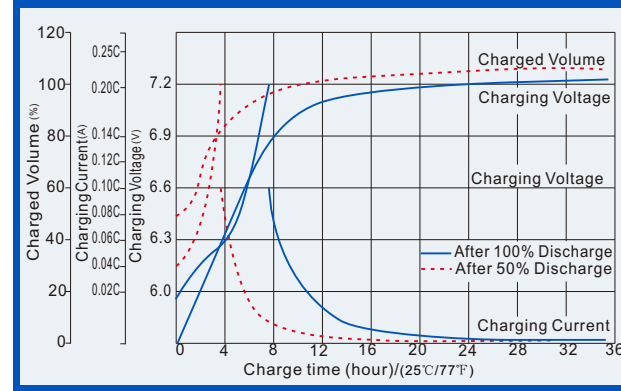


**Life characteristics of Cyclic Use (25°C, 77°F)**

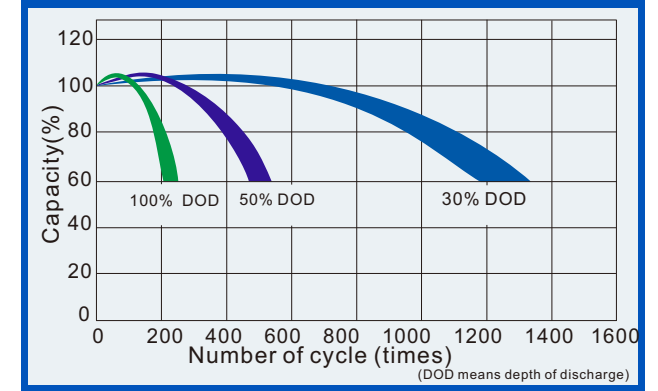


**Effect of Temperature on capacity**

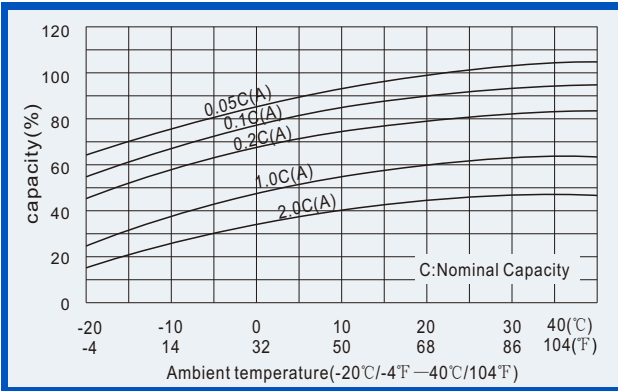


**Self-discharge characteristics**

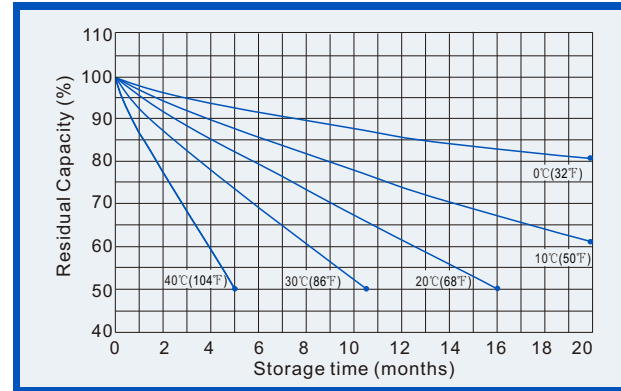


**Life Characteristics of standby use (25°C, 77°F)**

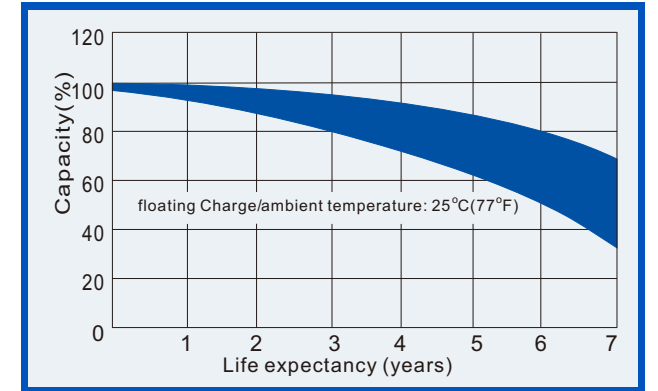

**Relationships for open voltage and remained capacity (for reference)**

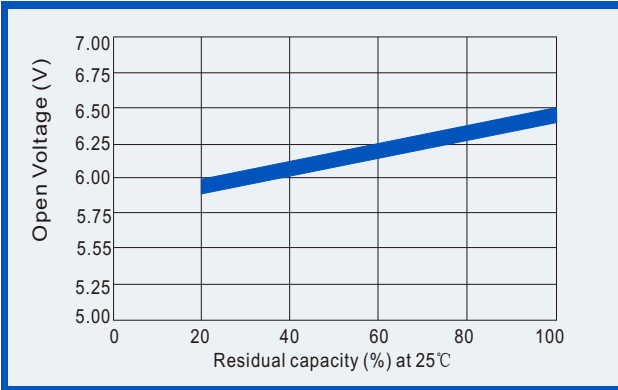

**Relationship for charging voltage and temperature**

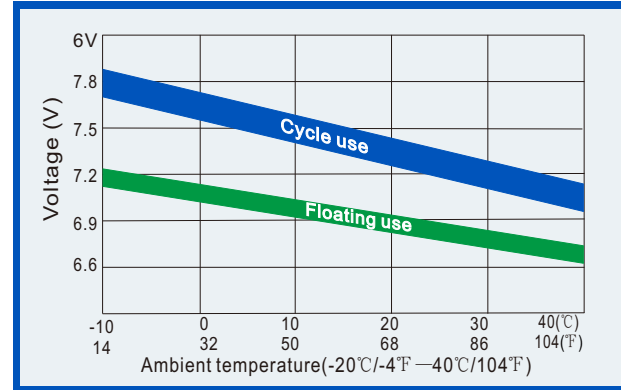

**Temperature effects on floating life**

