

General features for MPa Series (AGM) battery

- * Stable quality & high reliability.
- * Unique construction and sealing technique guarantees.
- * Design life 5years in float service;Long service life ,float or cyclic, which is shown in the specification sheet.
- * Maintenance-free operation.
UL-recognized component.
- * Heavy duty grids:
The heavy-duty lead calcium-alloy grids ,provide an extra margin of performance and service life in float & cyclic.
- * Case and cover are available in both standard and flame retardant ABS.
- * Low self discharge;low pressure venting system.



Maxton Power Tech Co.,Ltd
www.maxtonpower.com
info@maxtonpower.com

MP6-4B (6V4Ah)

Specifications

Nominal Voltage		6 V
Rated capacity (20 hour rate)		4 Ah
Dimensions (±1mm)	Total Height	62 mm(2.44 inches)
	Height	62 mm(2.44 inches)
	Length	194.5 mm(7.66inches)
	Width	25.3 mm(1.00 inches)
Weight Approx (±3%)		0.68 Kg(1.50 lbs)

Battery picture and construction




Battery Construction


Component	Positive plate	Negative plate	Container	Cover
Raw material	Lead dioxide	Lead	ABS	ABS
Component	Electrolyte	Separator	Safety valve	Terminal
Raw material	Dilute sulfuric acid	Fiberglass	Rubber	Wire+connector

Outer dimension and terminal

Wire connector
TW3

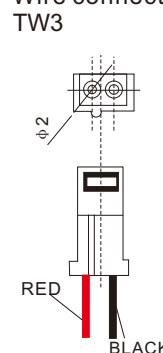

Outer dimensions(±1mm)

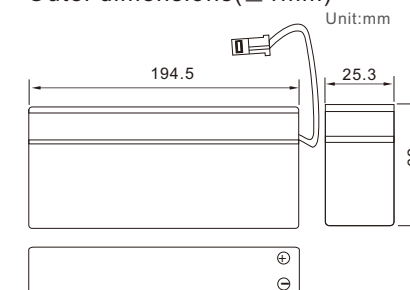

Characteristics

Capacity 25°C(77°F)	20 hour rate(0.2 A,5.25V) 10 hour rate(0.37A,5.25V) 5 hour rate(0.68A,5.25V) 1 hour rate(2.4 A,4.8V)	4.0Ah 3.7Ah 3.4Ah 2.4 Ah
Internal Resistance	Full charged battery at 25°C(77°F)	Approx 50 mΩ
Capacity affected by Temperature (20hour rate)	40°C (104°F) 25°C (77°F) 0°C (32°F) -15°C (5°F)	102% 100% 85% 65%
Remaining capacity Self-Discharge At 25°C(77°F)	Capacity after 3 month storage Capacity after 6 month storage Capacity after 12 month storage	91% 82% 64%
Terminal Type (Wire+connector)	TW3	
Max. Discharge current 25°C/(77°F)	10A (5Seconds)	
Nominal operating temperature	25°C ±5°C(77°F ±9°F)	
Operating Temperature Range	Discharge Charge Storage	-15°C ~50°C (5°F ~122°F) -10°C ~50°C (14°F ~122°F) -20°C ~50°C (-4°F ~122°F)
Charge methods (constant Voltage) At 25°C(77°F)	Cycle use Standby use	Initial Charging Current less than 1.2A Voltage 7.05-7.20V Temperature compensation:-15mV/°C Voltage 6.75-6.90V Temperature compensation:-9mV/°C

Constant current discharge (25°C , 77 °F)

Unit:A

Constant power discharge (25°C , 77 °F)

Unit:watts


Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C(77°F)

Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
4.80V	A 14.40	9.02	7.00	4.60	2.40	1.40	1.03	0.83	0.70	0.46	0.38	0.207
	W 84.9	53.3	40.3	24.4	13.8	8.1	5.96	4.78	4.06	2.68	2.19	1.200
5.10V	A 13.20	8.83	6.43	4.37	2.25	1.34	1.00	0.80	0.69	0.46	0.37	0.202
	W 79.9	52.5	37.9	24.3	13.0	7.8	5.79	4.63	3.98	2.63	2.15	1.167
5.25V	A 12.24	8.44	6.00	4.23	2.18	1.32	0.98	0.76	0.69	0.45	0.37	0.200
	W 77.2	49.0	36.3	24.0	12.6	7.6	5.69	4.40	3.96	2.61	2.13	1.158
5.40V	A 11.15	8.07	5.60	4.04	2.11	1.28	0.97	0.75	0.65	0.44	0.36	0.195
	W 73.7	47.5	34.9	23.9	12.3	7.5	5.63	4.35	3.78	2.50	2.08	1.133
5.55V	A 9.64	7.60	5.20	3.76	2.03	1.25	0.92	0.73	0.62	0.43	0.35	0.190
	W 57.4	45.9	33.3	23.8	12.1	7.4	5.46	4.33	3.70	2.42	2.04	1.125


(Above characteristics data are average values obtained within three charge/discharge cycles,not the minimum values.)

VRLA Battery (AGM technology) Maintenance-free Sealed Lead Acid Rechargeable Battery


Discharge characteristics (25°C, 77°F)

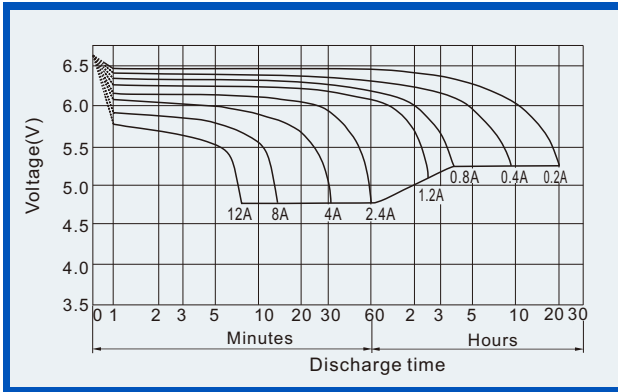


Charge characteristics (25°C, 77°F)

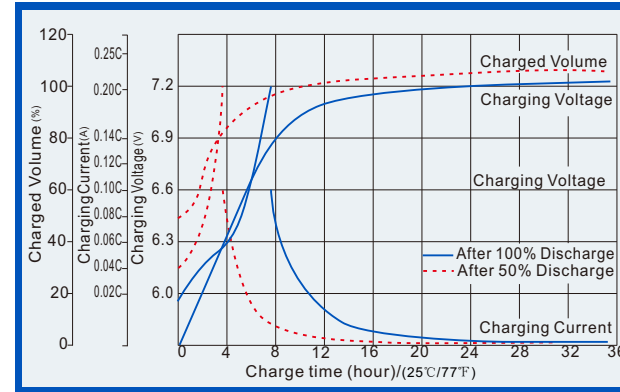


Life characteristics of Cyclic Use (25°C, 77°F)

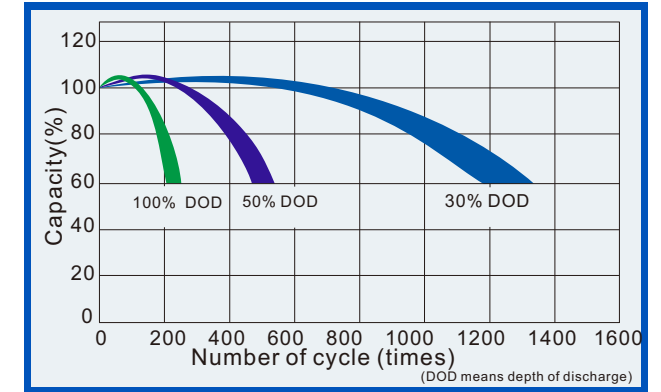


Effect of Temperature on capacity

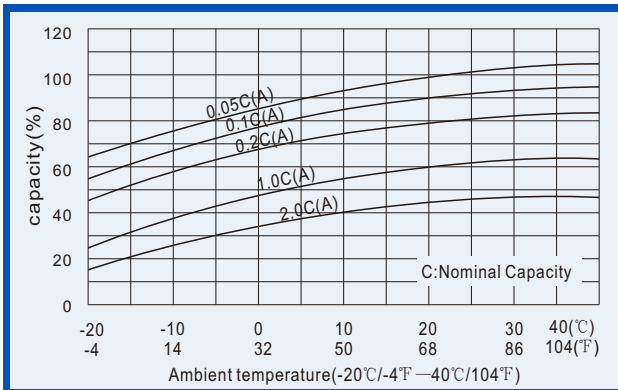


Self-discharge characteristics

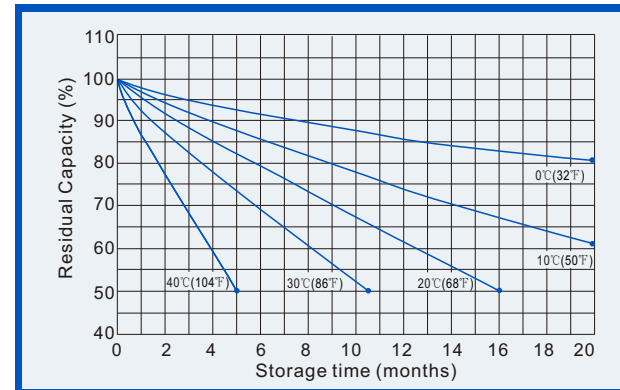


Life Characteristics of standby use (25°C, 77°F)

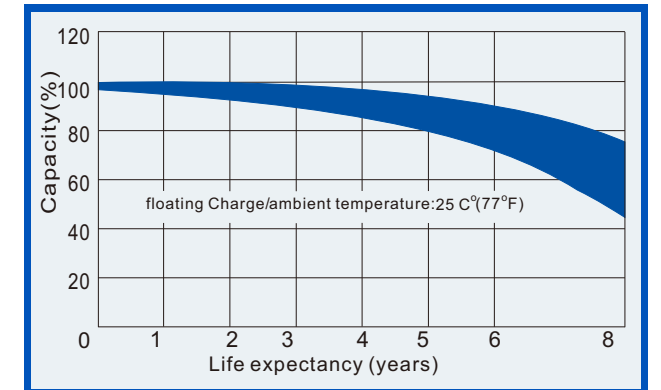

Relationships for open voltage and remained capacity (for reference)

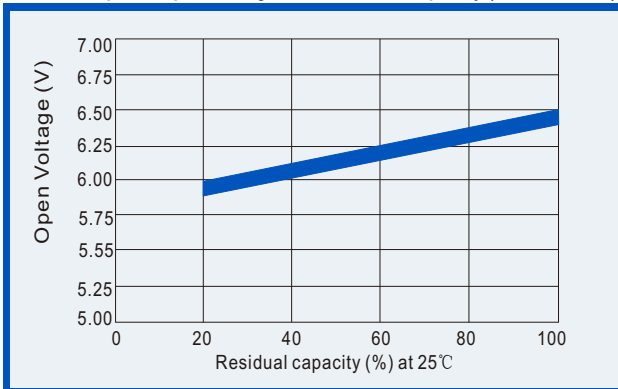

Relationship for charging voltage and temperature

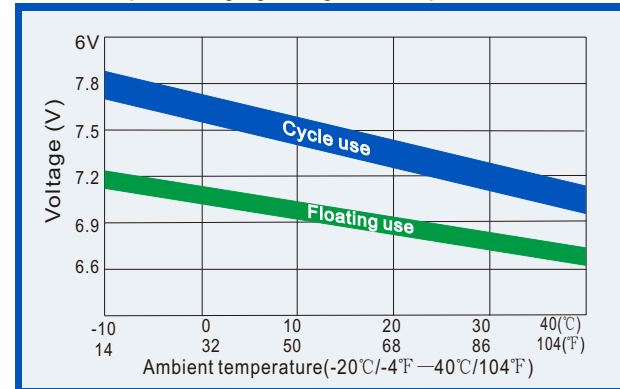

Temperature effects on floating life

