

General features for MPSS Series (AGM Start-Stop Battery)

- * Advanced Absorbed Glass Mat (AGM) technology.
- * Maintenance-free design.
- * Durable, longer cycling life than ordinary batteries.
- * Excellent charging acceptance and fast recharging.




Maxton Power Tech Co., Ltd
www.maxtonpower.com
info@maxtonpower.com

MPSS12-105 (12V105Ah)




Outer dimensions (mm)

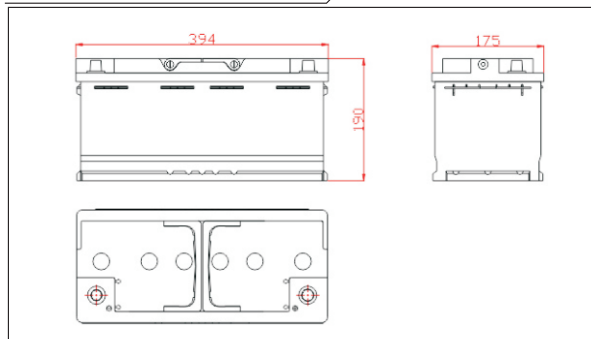

Specifications

Nominal Voltage		12 V
Rated capacity (20 hour rate)		105Ah
Dimensions	Total Height	190mm (7.48 inches)
	Height	190mm (7.48inches)
	Length	394mm (15.52 inches)
	Width	175mm (6.89 inches)
Weight Approx		29.0Kg (63.8 lbs)


Terminal Type (mm)

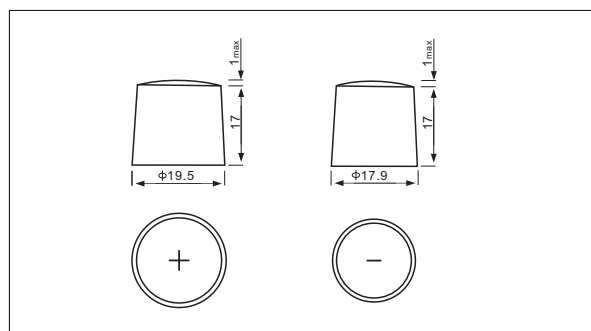


Characteristics

Capacity 25°C(77°F)	20 hour rate(5.25 A) Reserve capacity(25A) CCA(-18°C)	105AH 208min 950A
Capacity affected by Temperature (10hour rate)	40°C(104°F) 25°C(77°F) 0°C(32°F) -15°C(5°F)	102% 100% 85% 65%
Self-Discharge at 25°C(77°F)	Capacity after 3 month storage Capacity after 6 month storage Capacity after 12 month storage	91% 82% 64%
Charge (constant Voltage)	Initial Charging Current less than 27 A Voltage 15.00-15.60V	

Discharge Curves 25°C(77°F)

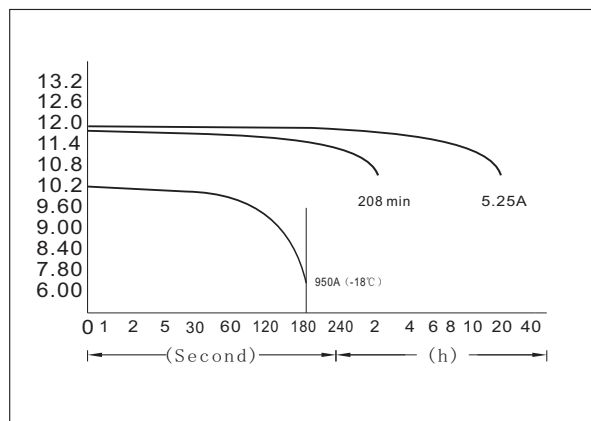

Charging characteristics(25°C)

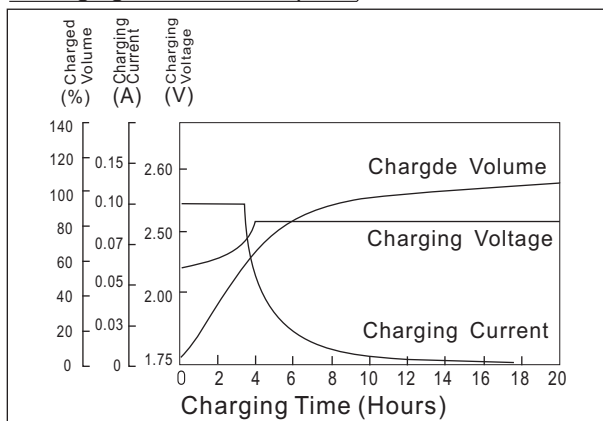

Curves of service life and ambient temperature

