

General features for MPG (GEL) battery

- * Nanometer SiO₂ and H₂SO₄ gelled electrolyte technology for gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- * Computer designed lead, calcium tin alloy grid for high power density.
- * Not restricted for air transport-complies with IATA/ICAO Special Provision A67.UL-recognized component.
- * Long service life, float or cyclic applications, specially suitable for motive power applications, such as golf trailer, sruubber, folklift, etc.
- * Maintenance-free operation. Lower self discharge.
- * Case and cover available in both standard and flame retardant ABS.
- * The design life to 12V GEL battery is 15years, the deep discharge cycles increased over 50% as compared with the AGM battery.



Maxton Power Tech Co., Ltd
www.maxtonpower.com
info@maxtonpower.com

MPG12-150 (12V150Ah)

Specifications

Nominal Voltage		12V	
Rated capacity (20 hour rate)		150 Ah	
Dimensions (±2mm)	Total Height	T50	241mm (9.49inches)
		T12	241mm (9.49inches)
	Height	241 mm (9.49 inches)	
	Length	484 mm (19.1 inches)	
Width		171 mm (6.73inches)	
Weight Approx (±3%)		47.0 Kg (103.5lbs)	

Battery picture and construction




Battery Construction


Component	Positive plate	Negative plate	Container	Cover
Raw material	Lead dioxide	Lead	ABS	ABS
Component	Electrolyte	Separator	Safety valve	Terminal
Raw material	Gelled acid	PVC	Rubber	Copper

Outer dimension and terminal



T50



Outer dimensions(±2mm)
Unit:mm

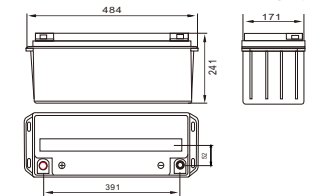

T12

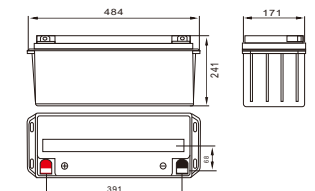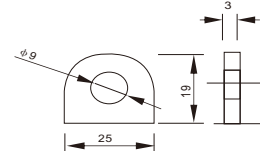

Characteristics

Capacity 25°C(77°F)	20 hour rate(7.5A, 10.5V)	150Ah
	10 hour rate(14A, 10.5V)	140Ah
	5 hour rate(24A, 10.5V)	120Ah
	1 hour rate(90A, 9.6V)	90Ah
Internal Resistance	Full charged battery at 25°C(77°F)	Approx 4.6mΩ
Capacity affected by Temperature (20hour rate)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Remaining capacity Self-Discharge At 25°C(77°F)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Terminal type	T50 (Option T12)	
Max. Discharge current 25°C/(77°F)	1000A (5Seconds)	
Nominal operating temperature	25°C ±5°C(77°F ±9°F)	
Operating Temperature Range	Discharge	-20°C ~ 55°C (-4°F ~ 131°F)
	Charge	-10°C ~ 55°C (14°F ~ 131°F)
	Storage	-20°C ~ 55°C (-4°F ~ 131°F)
Charge methods (constant Voltage) At 25°C(77°F)	Cycle use	Initial Charging Current less than 37.5 A Voltage 14.5-15.0V Temperature compensation:-20mV/°C
	Standby use	Voltage 13.5-13.8V Temperature compensation:-30mV/°C

Constant current discharge (25°C , 77 °F)

Constant power discharge (25°C , 77 °F)

Unit:A


Unit:watts

Constant Current(Amp) and Constant Power(Watt) Discharge Table											
Time		10min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	300.0	165.0	90.0	52.5	38.7	30.0	24.8	17.1	14.3	7.8
	W	3180	1757	963	567	422	330	272.9	189.8	158.2	87.4
10.20V	A	285.0	166.5	84.6	50.1	37.5	29.3	24.3	17.0	14.1	7.6
	W	3135	1840	939	561	424	332	276	192	160	86
10.50V	A	270.0	153.0	82.5	48.9	36.6	28.8	24.0	16.7	14.0	7.5
	W	3024	1721	932	557	419	331	276	191	160	86
10.80V	A	255.0	141.0	79.5	47.7	35.7	28.4	23.4	16.4	13.8	7.3
	W	2894	1607	910	551	414	330	273	190	161	85
11.10V	A	240.0	126.0	75.0	46.5	34.5	27.5	22.8	15.9	13.1	7.1
	W	2760	1455	870	544	405	324	269	188	155	84


(Above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.)

GEL Battery (GEL technology) Maintenance-free Sealed Lead Gel Rechargeable Battery


Discharge characteristics (25°C, 77°F)

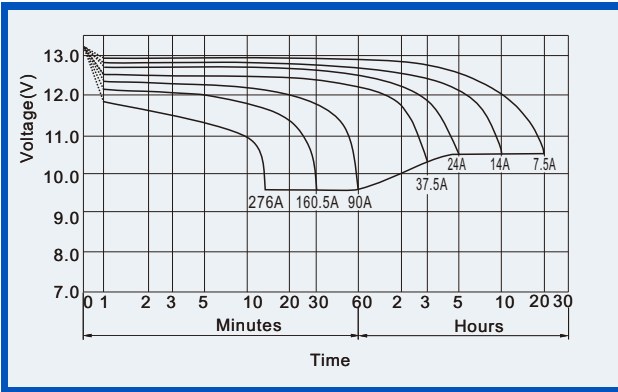


Charge characteristics (25°C, 77°F)

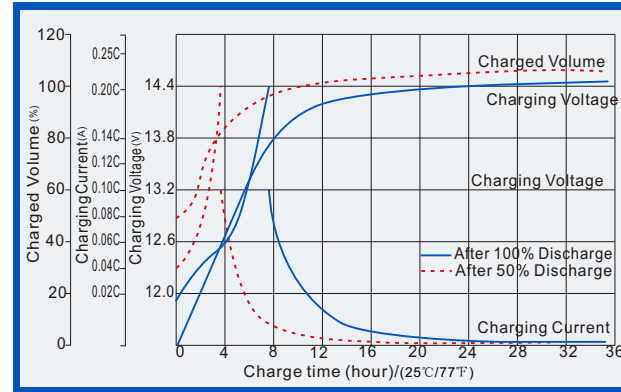


Life characteristics of Cyclic Use (25°C, 77°F)

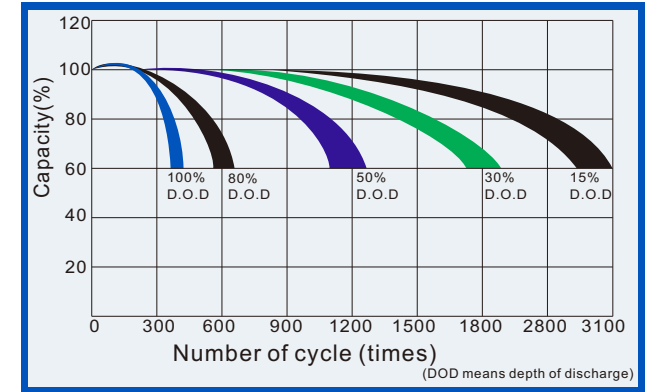


Effect of Temperature on capacity

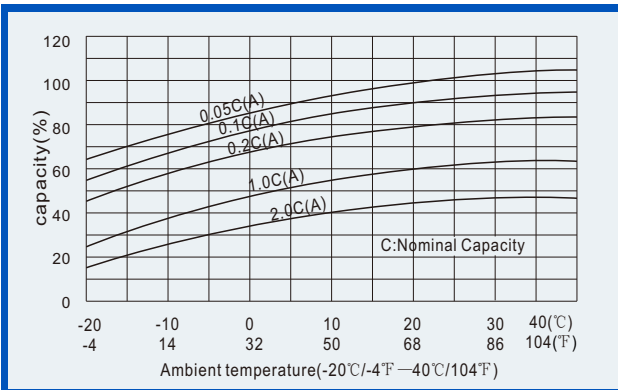


Self-discharge characteristics

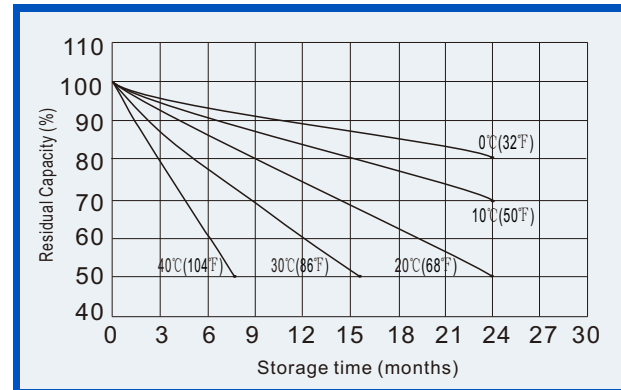


Life Characteristics of float service (25°C, 77°F)

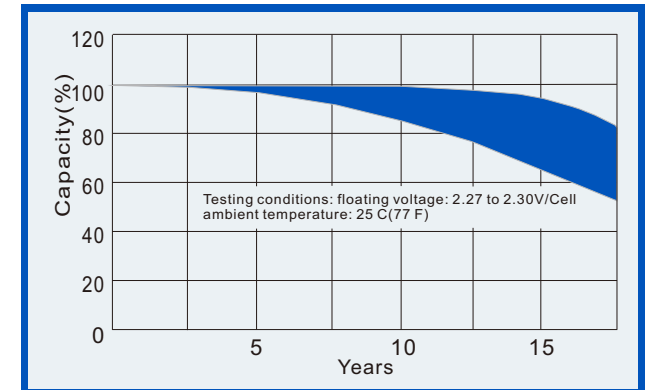

Relationships for open voltage and remained capacity (for reference)

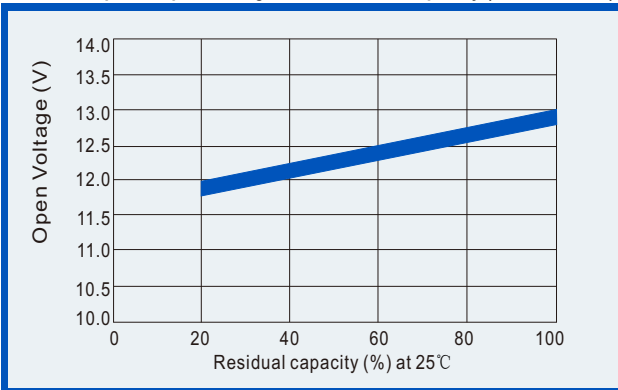

Relationship for charging voltage and temperature

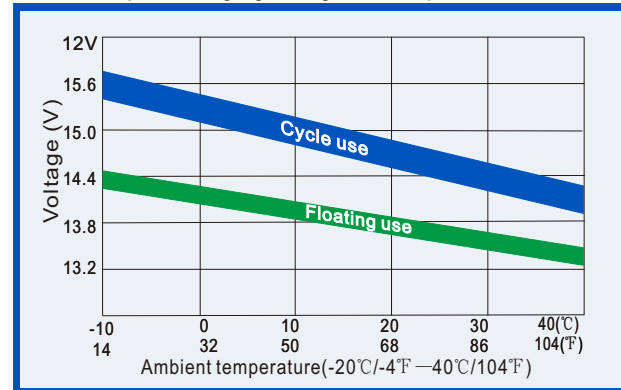

Temperature effects on floating life

