

### General features for MPa Series (AGM) battery

- \* Stable quality & high reliability.
- \* Unique construction and sealing technique guarantees.
- \* Design life 5years in float service; Long service life ,float or cyclic, which is shown in the specification sheet.
- \* Maintenance-free operation. UL-recognized component.
- \* Heavy duty grids: The heavy-duty lead calcium-alloy grids ,provide an extra margin of performance and service life in float & cyclic.
- \* Case and cover are available in both standard and flame retardant ABS.
- \* Low self discharge; low pressure venting system.



**Maxton Power Tech Co., Ltd**  
www.maxtonpower.com  
info@maxtonpower.com

## MP12-26II (12V26Ah)

### Specifications

Nominal Voltage		12V
Rated capacity (20 hour rate)		26 Ah
Dimensions (±2mm)	Total Height	182 mm (7.17 inches)
	Height	175 mm (6.89 inches)
	Length	166 mm (6.5 inches)
	Width	125 mm (4.92 inches)
Weight Approx (±3%)		7.3Kg (16.08bs)


### Battery picture and construction



#### Battery Construction

Component	Positive plate	Negative plate	Container	Cover
Raw material	Lead dioxide	Lead	ABS	ABS
Component	Electrolyte	Separator	Safety valve	Terminal
Raw material	Dilute sulfuric acid	Fiberglass	Rubber	Copper (or lead)

### Outer dimension and terminal

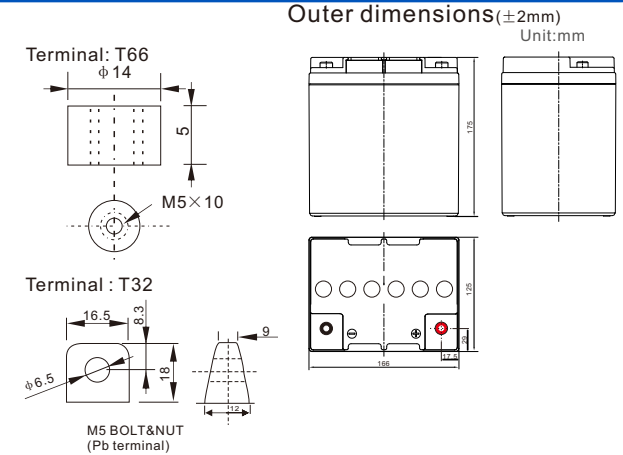

### Characteristics

Capacity 25°C(77°F)	20 hour rate(1.3 A, 10.5V)	26.0Ah
	10 hour rate(2.39A, 10.5V)	23.9Ah
	5 hour rate(4.45A, 10.5V)	22.2Ah
	1 hour rate(15.6 A, 9.6V)	15.6 Ah
Internal Resistance	Full charged battery at 25°C(77°F)	Approx 14 mΩ
Capacity affected by Temperature (20hour rate)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
Remaining capacity Self-Discharge At 25°C(77°F)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Terminal type	T66 (Option T32)	
Max. Discharge current 25°C/(77°F)	390A (5Seconds)	
Nominal operating temperature	25°C ±5°C(77°F ±9°F)	
Operating Temperature Range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Charge methods (constant Voltage) At 25°C(77°F)	Cycle use	Initial Charging Current less than 7.8 A Voltage 14.1-14.4V Temperature compensation:-30mV/°C
	Standby use	Voltage 13.5-13.8V Temperature compensation:-18mV/°C

### Constant current discharge (25°C , 77 °F)

### Constant power discharge (25°C , 77 °F)

Unit:A

Unit:watts


#### Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C(77°F)

Time		5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	93.60	61.36	45.50	29.90	15.60	9.10	6.70	5.37	4.56	3.01	2.46	1.34
	W	1103.9	693.3	524.3	317.4	179.8	105.3	77.5	62.2	52.8	34.8	28.5	15.6
10.20V	A	85.80	58.72	41.82	28.38	14.65	8.73	6.50	5.20	4.47	2.96	2.42	1.31
	W	1038.9	656.5	492.9	315.3	169.0	101.1	75.3	60.2	51.8	34.2	28.0	15.2
10.50V	A	78.11	54.86	39.00	27.52	14.17	8.56	6.39	4.94	4.45	2.93	2.39	1.30
	W	1003.2	637.0	471.3	312.0	164.0	99.1	74.0	57.2	51.5	33.9	27.7	15.1
10.80V	A	75.06	52.43	36.40	26.76	13.69	8.34	6.28	4.85	4.23	2.85	2.33	1.27
	W	879.7	617.5	453.9	310.9	159.3	97.1	73.1	56.5	49.2	32.5	27.1	14.7
11.10V	A	69.42	49.40	33.80	26.00	13.22	8.13	5.96	4.77	4.04	2.77	2.28	1.24
	W	850.4	596.9	432.3	308.8	157.1	96.4	71.0	56.3	48.1	31.4	26.5	14.6


(Above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.)

# VRLA Battery (AGM technology) Maintenance-free Sealed Lead Acid Rechargeable Battery


**Discharge characteristics (25°C, 77°F)**

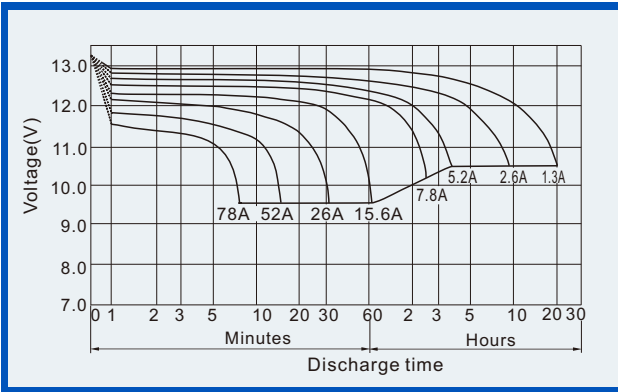


**Charge characteristics (25°C, 77°F)**

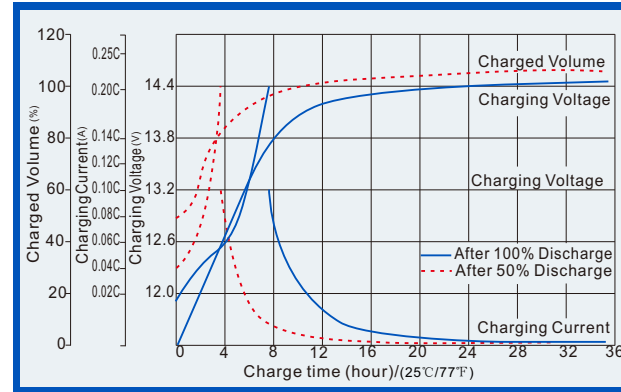


**Life characteristics of Cyclic Use (25°C, 77°F)**

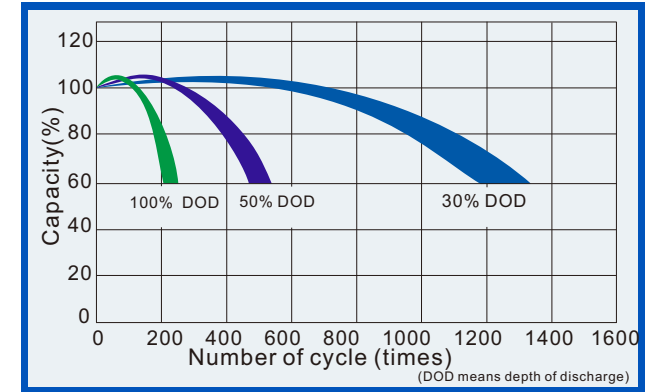


**Effect of Temperature on capacity**

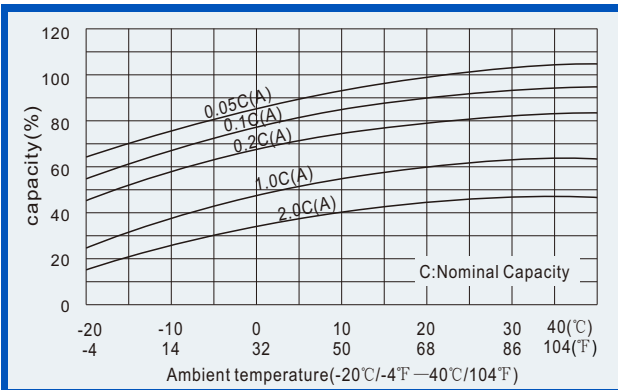


**Self-discharge characteristics**

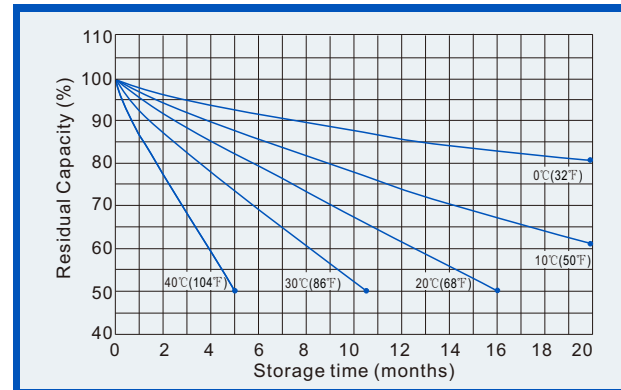


**Life Characteristics of standby use (25°C, 77°F)**

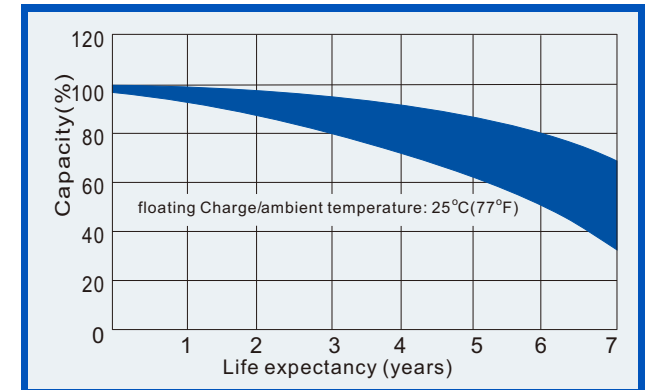

**Relationships for open voltage and remained capacity (for reference)**

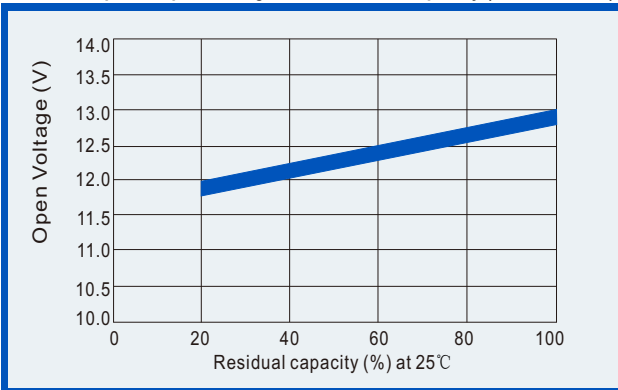

**Relationship for charging voltage and temperature**

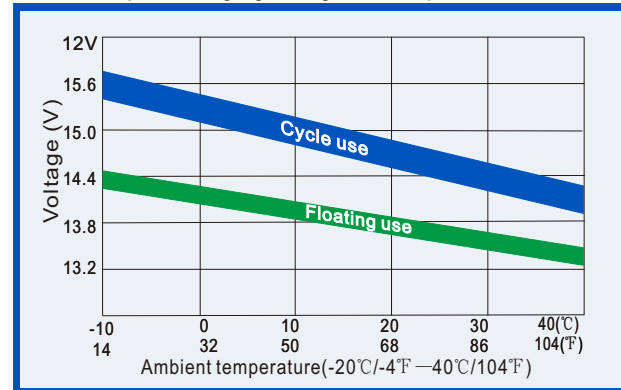

**Temperature effects on floating life**

